


M8000 Float Switch (FLT002)

- Versatile, economical and compact.
- UL Recognized part used in thousands of products.
- Normally closed; float can be removed, inverted and replaced for normally open operation.
- 1/8" NPT tapered stem threading; self-sealing; does not come with a nut.
- Warranted against manufacturer defect for one year from delivery date.

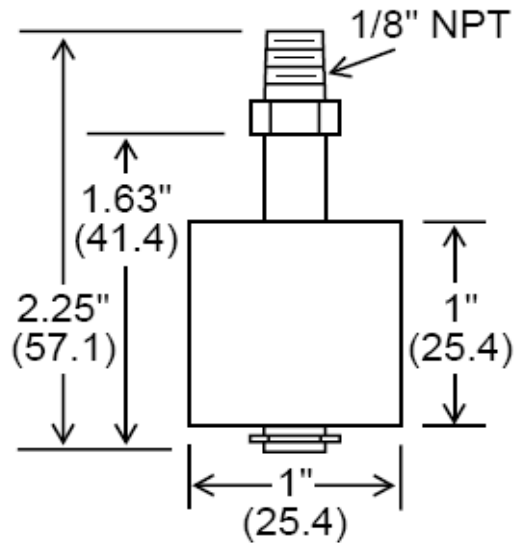

Unit: Inches (mm)

Operation: When the float drops to within .12" (+/- .04") of the bottom clip, the internal reed contacts draw together and complete a circuit. When the float rises .20" (+/- .04") from the bottom clip, the contacts separate and open the circuit.

Materials:

Float:	Polypropylene Foam
Stem:	Polypropylene
O-ring:	None (tapered threading)
Clip:	Polypropylene
Leads:	22 ga. MTW, 24", white
Top Fill:	Epoxy

Specifications:*

Temperature:	+105°C
Contact rating:	30VA
Max Pressure:	100 PSIG
Approvals:	UL, CSA, NSF
Specific Gravity:	.8

*Can be customized to your requirements