


Ultra Low Level Normally-Open Float Switch (FLT009)

- Versatile, economical and compact.
- Normally-open – cannot be reversed to normally-closed.
- Available normally-closed by special order.
- 1/8" NPT tapered stem threading; self-sealing; does not come with a nut.
- Warranted against manufacturer defect for one year from delivery date.
- Activates in as little as 3/4" of liquid.

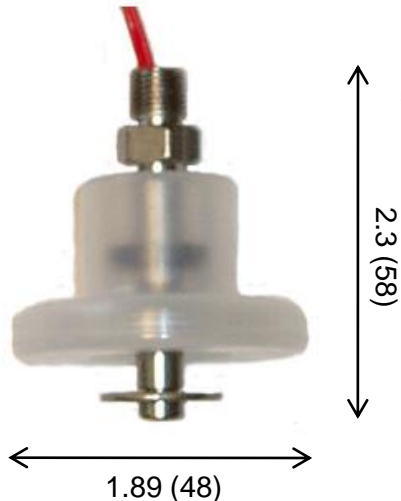

Unit: Inches (mm)

Operation: When the float rises from the horizontal position, the internal reed contacts draw together and complete a circuit. When the float drops, the contacts separate and open the circuit.

Materials:

Float:	Polypropylene
Stem:	316 Stainless Steel
O-ring:	None – self sealing
Clip:	316 Stainless Steel
Leads:	22 ga., 24"
Top Fill:	Epoxy

Specifications:*

Temperature:	+105°C
Contact rating:	30VA
Max Pressure:	25 PSIG
Approvals:	UL, CSA, NSF
Specific Gravity:	.55

*Can be customized to your requirements