


FLT224 Float Switch

- Versatile, economical and compact.
- Similar to our FLT001 but with a longer stem to allow measurement deeper in a vessel.
- UL Listed internal reed switch.
- Normally closed; float can be removed, inverted and replaced for normally open operation.
- M10 stem threading – each switch comes with a nut and silicon o-ring.
- Warranted against manufacturer defect for one year from delivery date.

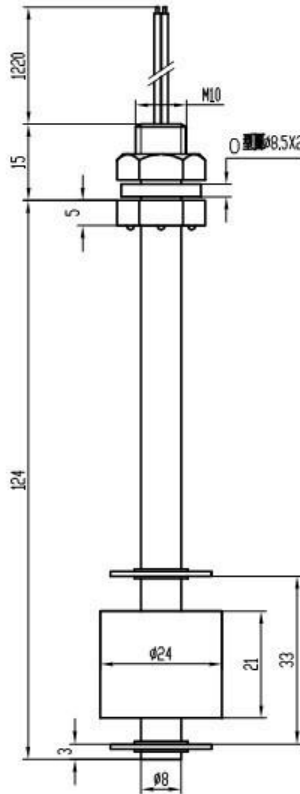

Unit: mm

Operation: When the float drops toward the c-clip, the internal reed contacts draw together and complete a circuit. When the float rises, the contacts separate and open the circuit.

Materials:

1. Float: Polypropylene
2. Stem: POM
3. Nut: POM
4. O-ring: Silicon
5. Clip: POM
6. Leads: 1007 AWG22, 13", black
7. Top Fill: Epoxy

Specifications:*

- Temperature: -10 ~ +80°C
 Contact rating: 50W
 Max Switching Voltage: <=220VAC

*Can be customized to your requirements